



CLICKER WRENCH

The HYTORC Clicker Wrench is a simple and convenient tool for tightening nuts to specification in a wide range of bolting applications. This micro-adjustable torque wrench is available in various drive sizes and torque capacities. Handles are lightly knurled for a tough, non-slip grip. The tool has a spring-loaded pull down Lock Ring and an easy-to-read laser-etched scale to quickly and easily set torque. The wrench also features a quick-release button for easy socket removal. The HYTORC Clicker Wrench is supplied with an ISO certified calibration certificate.

QUICK RELEASE BUTTON



The Quick Release Button, conveniently located near the drive, easily engages and disengages the socket from the drive and provides strong socket retention.

RATCHET REVERSING LEVER




The Ratchet Reversing Lever quickly and conveniently changes the ratcheting direction. The lever has three positions: Clockwise, Counter-Clockwise, and Locked.

LOCK RING



The spring-loaded positive Lock Ring easily and securely sets the torque value. The laser-etched torque scales are clearly legible in both imperial and metric.

MANUAL WRENCH

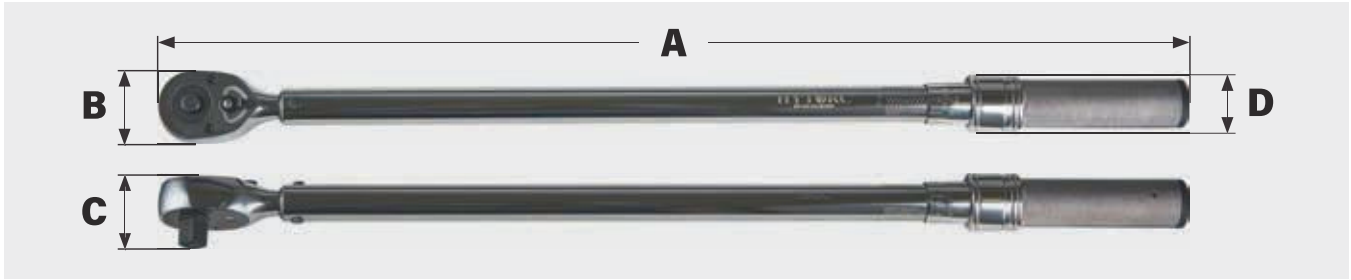

ACCURACY

± 4% CW ± 6% CCW of indicated value, CW, from 20% to 100% of full scale.

DUAL SCALE MODELS - TORQUE SCALE IN BOTH IMPERIAL AND METRIC

| CONFIGURATIONS | DRIVE | A | B | C | D | WEIGHT | PRIMARY TORQUE RANGE | INCREMENTS |
|-------------------|-------|-------|------|------|------|--------|----------------------|------------|
| IMPERIAL | | in. | | | | lb | | |
| MW-006-250-MRMH | 3/8 | 11.25 | 1.06 | 0.93 | 1.06 | 0.95 | 30-250 in-lbs. | 1 |
| MW-006-1000-MRMH | 3/8 | 16.00 | 1.43 | 1.20 | 1.40 | 2.50 | 150-1,000 in-lbs. | 5 |
| MW-006-100-MFRMH | 3/8 | 16.00 | 1.43 | 1.20 | 1.40 | 2.55 | 10-100 ft-lbs. | 0.5 |
| MW-008-150-MFRMH | 1/2 | 19.00 | 1.70 | 1.40 | 1.40 | 3.15 | 20-150 ft-lbs. | 1 |
| MW-008-250-MFRMH | 1/2 | 24.40 | 1.70 | 1.40 | 1.40 | 3.15 | 30-250 ft-lbs. | 1 |
| MW-010-400-MFRMH | 3/4 | 34.25 | 2.50 | 2.10 | 1.40 | 10.30 | 50-400 ft-lbs. | 5 |
| MW-010-600-MFRMH | 3/4 | 42.00 | 2.50 | 2.00 | 1.15 | 11.85 | 100-600 ft-lbs. | 5 |
| MW-020-1000-MFRMH | 1 | 70.00 | 3.00 | 3.00 | 1.50 | 25.10 | 200-1,000 ft-lbs. | 5 |

| METRIC | IN. | MM | | | | KG | SECONDARY TORQUE RANGE | INCREMENTS |
|-------------------|-----|------|----|----|----|------|------------------------|------------|
| MW-006-250-MRMH | 3/8 | 286 | 27 | 24 | 27 | 0.4 | 4.0-27.7 Nm | .12 |
| MW-006-1000-MRMH | 3/8 | 406 | 36 | 30 | 36 | 1.1 | 19.8-110.2 Nm | .6 |
| MW-006-100-MFRMH | 3/8 | 406 | 36 | 30 | 36 | 1.2 | 16.9-132.2 Nm | .7 |
| MW-008-150-MFRMH | 1/2 | 483 | 43 | 36 | 36 | 1.4 | 34-197 Nm | 1.4 |
| MW-008-250-MFRMH | 1/2 | 620 | 43 | 36 | 36 | 1.4 | 47-332 Nm | 1.4 |
| MW-010-400-MFRMH | 3/4 | 870 | 64 | 53 | 36 | 4.7 | 85-525 Nm | 3.4 |
| MW-010-600-MFRMH | 3/4 | 1067 | 64 | 51 | 29 | 5.4 | 169-779 Nm | 6.8 |
| MW-020-1000-MFRMH | 1 | 1778 | 76 | 76 | 38 | 11.4 | 305-1322 Nm | 6.8 |

METRIC SCALE MODELS - TORQUE SCALE IN METRIC ONLY

| CONFIGURATIONS | DRIVE | A | B | C | D | WEIGHT | TORQUE RANGE | INCREMENTS |
|--------------------|-------|------|----|----|----|--------|--------------|------------|
| METRIC | IN. | MM | | | | KG | | |
| MW-006-60NM-RMHSS | 3/8 | 413 | 47 | 38 | 35 | 1.1 | 10-60 Nm | 0.5 |
| MW-006-100NM-RMHSS | 3/8 | 413 | 47 | 38 | 35 | 1.1 | 20-100 Nm | 0.5 |
| MW-008-200NM-RMHSS | 1/2 | 503 | 47 | 38 | 35 | 1.5 | 40-200 Nm | 2 |
| MW-008-340NM-RMHSS | 1/2 | 625 | 47 | 39 | 35 | 1.5 | 60-340 Nm | 2 |
| MW-010-800NM-RMHSS | 3/4 | 1051 | 61 | 58 | 35 | 5.4 | 150-800 Nm | 5 |

LIMITED WARRANTY

The HYTORC Clicker Wrench is backed by a one year warranty. This warranty covers manufacturer defects and workmanship. The warranty excludes misuse, abuse and normal wear and tear. Exclusion is not allowed in some states and may not apply. This warranty give you specific legal rights, and you may have other rights, which vary from state to state.

HYTORC owns all content, copyrights, trademarks and patents in this document. © 2021 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.



ADVANCED BOLTING SOLUTIONS PVT. LTD.

HO: "ABS House", Plot No. W-116 (A),
T.T.C. Industrial Area, MIDC Khairane,
Navi Mumbai - 400 710.

Tel: +91 22 3526 4444
E-mail: sales@absgroup.in
Web: www.absgroup.in